

GEDA®
MULTILIFT P12



GEDA®
ORIGINAL



▷ Innovations
▷ Know-how
▷ Up-to-date production technologies



GEDA®
ORIGINAL



GEDA®
World-wide competence



GEDA®
MULTILIFT P12

Your GEDA-Dealer:

GEDA®
ORIGINAL


**GEDA-Dechentreiter
GmbH & Co.KG**
Mertinger Straße 60
D-86663 Asbach-Bäumenheim
Phone +49 (0) 906 9809-0
Fax +49 (0) 906 9809-50
info@geda.de
www.geda.de

Depending on structural conditions, you can choose between high and low landing level safety gates to ensure safe loading and unloading at landing levels.


Edition 04/10/GB

Platform versions:


Landing level safety gate

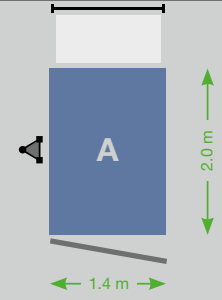

Landing level safety gate

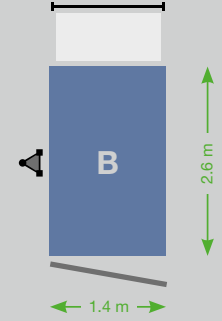

Landing level safety gate

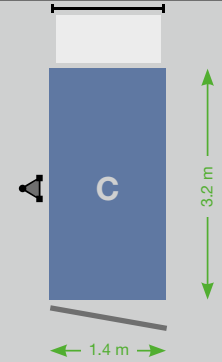

MULTILIFT P12	
Load capacity	
Persons	12 persons
Material	1500 kg
Lifting height	150 m
Lifting speed	12-40 m/min.
Power supply	2 x 3.0/6.1 kW/400 V/50 Hz

The GEDA Multilift P12 puts every advantage at your disposal:

- ▶ **Compact, pre-installed base unit comprising: car, base enclosure, flat cable bin and drive ❶**
- ▶ **No foundations necessary**
- ▶ **Modular system**



- ❶ Unloading the base unit with the crane.
- ❷ Securing the mast system from the assembly bridge.
- ❸ Optional:
 - Level pre-selection in car
 - Level pre-selection at all levels
- ❹ Ideally suited for installation in pits.