


## GED& MULTILIFT P22





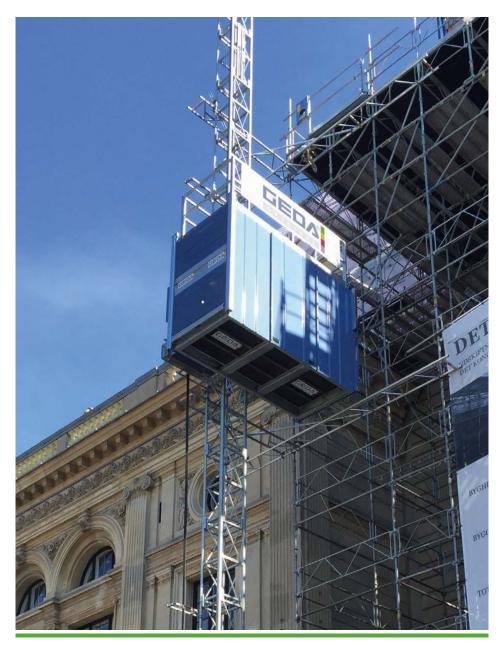

### **GEDA MULTILIFT P22**

The GEDA Multilift P22 is the powerhouse of the Multilift range. Despite its high load capacity of 2000 kg or 22 passengers, it runs on only one mast of the proven GEDA VARIO-MAST system.

The optionally available 2.9 x 2.0 m (W x H) C-door allows convenient loading of the platform even with large, bulky construction materials.

The easy-maintenance design of the GEDA Multilift P22 is another advantage: all electronic components are accessible directly from the platform.

Thanks to the patented GEDA flat cable bin system, passengers and materials can be transported up to a height of 200 m quickly and safely. The special highlight: the GEDA Multilift P22 is operated with a cable trolley above a lifting height of 50 m. The trolley has a space-saving design so that the entry height at the lowest landing level is still at a comfortable 450 mm.

The already convenient operation of the passenger and material hoist is made even more simple and efficient with the optionally available intelligent call control.

The benefits of the Multilift range, such an uncomplicated installation through the compact, pre-installed unit and installation without a separate foundation, complete the overall concept.

### **Technical data:**



2000 kg 22 persons



200 m




54 m/min



30 kW/380-480 V/ 50-60 Hz/63 A

TEMPORARY INSTALLATIONS 147

# GEDA MULTILIFT P22

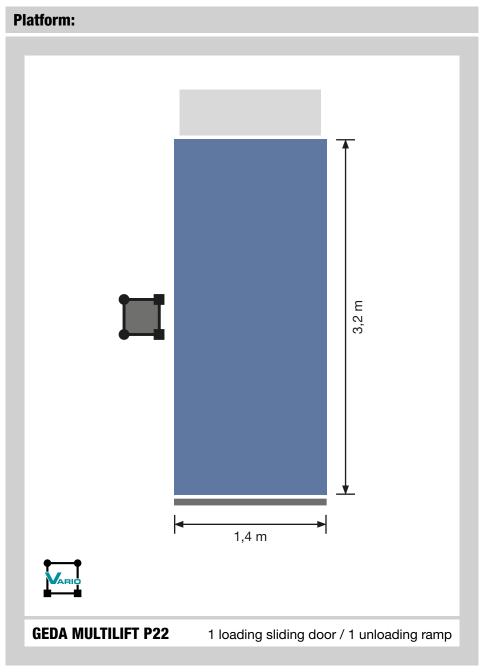





#### Art. No. 01217 Standard Art. No. 01268 Standard-Basic Art. No. 68301 Comfort incl. sheet metal panel Art. No. 68311 Standard incl. sheet metal panel Art. No. 68312 Standard-Basic incl. sheet metal panel

**Further landing level safety gates:** 

Art. No. 41442;41441